


HuSh Lite Product Data Sheet

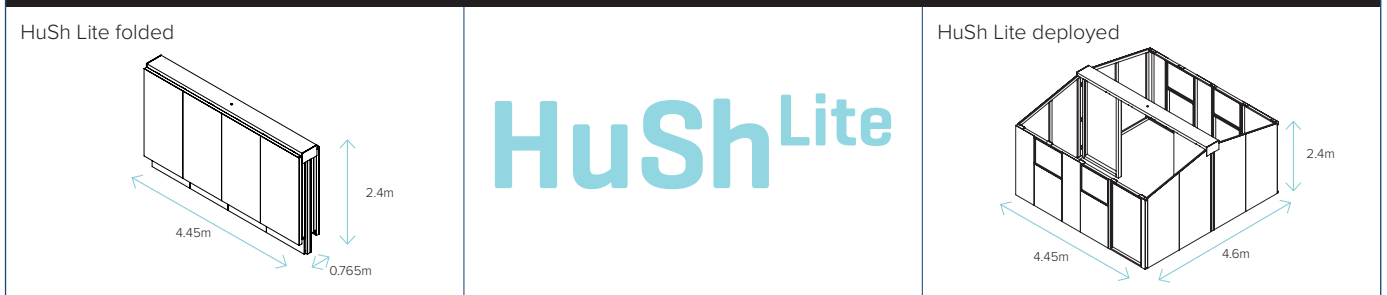

	LENGTH	WIDTH	HEIGHT	WEIGHT
Folded Dimension	4.45m	0.765m	2.4m	700kg
Deployed Dimension	4.45m	4.6m	2.4m	

Materials ⁱ :	Structure:	Douglas Fir Softwood (Structural timbers graded CE Graded 16 and 24)
	Outer Skin:	Birchwood / Phenolic / Marine Plywood (British Standard 636-3, permanent outdoor rating)
	Metalware:	Stainless Steel / BZP Steel / Galvanised Steel
Floorspace ⁱⁱ :	External = 20.57m ² / 221ft ²	Internal = 19m ² / 204ft ²
Openings:	4 windows @ 0.68m ²	1 or 2 door @ 1.871m ²
Ventilation:	Louvre window opening with bug mesh	Opening window casement with Perspex
Weight:	700kg	
Internal Spec:	Central dividing wall No floor Walls and ceilings unskinned	
Snow Load:	1 ton/m ²	
Thermal:	U value = 0.11m ² deg C	R value = 0.05°F/ft ² /BTU
Fire Rating ⁱⁱⁱ :	Index = 90	Rated Class 3 (Continuous use without ignition 212°F. Contact with open flame not recommended)
Flashpoint:	600°F	180 secs to reach flashover at 50kW/m ²
Waterproofing:	BS/EN 1991 Design Codes	BS/EN 13986-2004 standards
	Tested at 10 gallons/minute flow rate	Pressured at 130bar/420 litres/hour
Max windspeed:	No data available at this time	
Options	Extruded Polystyrene or Double Foil Laminate insulation	
	Inner lining materials	
	Electrical lighting and outlets / Exterior connection to water supply	
	Ground sheet can be supplied	
	Kit form/quick release format	

Notes:

ⁱ In accordance with British Standards and Eurocode 5 for Design of Timber Structures.

ⁱⁱ Sphere project (IFRC) guidelines handbook 3rd edition 2005

ⁱⁱⁱ Tested and certified in accordance with UK Regulatory Reform Fire Safety Orders 2005

Extremis Technology Ltd

Registered Address: Hethel Engineering Centre, Chapman Way, Norwich, NR14 8FB

Registered in England & Wales with Company No: 07133802

Members of Institute for Manufacturing (IfM) and the Engineering and Physical Sciences Research Council (EPSRC)